

sunways

Sunways Single Phase with Dual MPPT
STS-3K/3.6K/4.2K/4.6K/5K/6KTL

MAX 98.1% EFFICIENCY

IP65 PROTECTION



Safe & Reliable

- High reliability due to good heat dissipation design
- IP65, wider working temperature and altitude, adapt to various installation environments
- Integrated lightning protection for both DC and AC
- Adapt to complex power grid
- High anti-corrosion ability with aluminum alloy die casting technology



High Revenue

- High yield with Max. 98.1% efficiency
- European weighted efficiency 97.5%
- Wide MPPT voltage range
- Up to 10% continuous output overloading capacity
- Dual MPPT design with precise MPPT algorithm
- Standard 12 years product and labour warranty



Easy to use

- Compact elegant design, light weight, one-person installation
- Plug and play connectors, easy for installation
- Support wireless and wired internet connection (RS485, Wi-Fi/GPRS/LAN optional)
- Remote upgrading available
- Intelligent positioning abnormal string with integrated I/V scan function

TECHNICAL PARAMETERS

SINGLE PHASE:STS-3K/3.6K/4.2K/4.6K/5K/6KTL


Model	STS-3KTL	STS-3.6KTL	STS-4.2KTL	STS-4.6KTL	STS-5KTL	STS-6KTL
Input						
Max. Input Power (W)	4,500	5,400	6,300	6,900	7,500	9,000
Start-up Voltage (V)	120	120	120	120	120	120
Min. DC Voltage (V)	100	100	100	100	100	100
Max. DC Input Voltage (V)	600	600	600	600	600	600
Rated DC Input Voltage (V)	360	360	360	360	360	360
MPPT Voltage Range (V)	100-550	100-550	100-550	100-550	100-550	100-550
No. of MPP Trackers	2	2	2	2	2	2
No. of DC Inputs per MPPT	1/1	1/1	1/1	1/1	1/1	1/1
Max. Input Current (A)	12.5/12.5	12.5/12.5	12.5/12.5	12.5/12.5	12.5/12.5	12.5/12.5
Max. Short-circuit Current (A)	15/15	15/15	15/15	15/15	15/15	15/15
Output						
Rated Output Power (W)	3,000	3,600	4,200	4,600	5,000	6,000
Max. Output Power (W)	3,300	3,960	4,600	4,600	5,500 *	6,600
Max. Apparent Power (VA)	3,300	3,960	4,600	4,600	5,500 *	6,600
Rated Output Voltage (V)	220/230					
Rated AC Frequency (Hz)	50/60Hz 45-55Hz/55-65Hz					
Max. Output Current (A)	15	18	21	21	25 **	28.7
Power Factor	0.8 leading ∙ ∙ 0.8 lagging					
Max. Total Harmonic Distortion	<3% @Rated Output Power					
DCI	<0.5%In					
Efficiency						
Max. Efficiency	98.1%	98.1%	98.1%	98.1%	98.1%	98.1%
European Efficiency	97.5%	97.5%	97.5%	97.5%	97.5%	97.5%
MPPT Efficiency	99.9%	99.9%	99.9%	99.9%	99.9%	99.9%
Protection						
DC Reverse Polarity Protection	Integrated					
Insulation Resistance Protection	Integrated					
DC Switch	Optional					
Surge Protection	Integrated AC/DC (Type II)					
Over-temperature Protection	Integrated					
Residual Current Protection	Integrated					
Islanding Protection	Integrated					
AC Short-circuit Protection	Integrated					
AC Over-voltage Protection	Integrated					
General Data						
Dimensions (mm)	410W*360H*120D					
Weight (kg)	13					
Protection Degree	IP65					
Self-consumption at Night (W)	<1					
Topology	Transformer-less					
Operating Temperature Range (° C)	-30~60					
Relative Humidity	0~100%					
Operating Altitude (m)	4000 (derating@ > 3000)					
Cooling	Natural Convection					
Noise Level (dB)	< 25					
Display	OLED & LED					
Communication	RS485, WiFi/GPRS/LAN (Optional)					
Compliance	NB/T32004、IEC62109、IEC62116、VDE4105、VDE0126、UTE C15-712-1、AS4777、C10/11、CEIO-21、RD1699、NBR16149、IEC61727、IEC60068、IEC61683、EN50549、EN61000					

* The default Max. Output Power is 4999 W in Australian, which can be increased to 5500 W through the inverter screen settings if Australian DNSPs & local authorities' allow it.

**The default Max. Apparent Power is 4999 VA in Australian, which can be increased to 5500 VA through the inverter screen settings if Australian DNSPs & local authorities' allow it.

Sunways Single Phase with Dual MPPT

STS - 7 K ~ 11 K T L

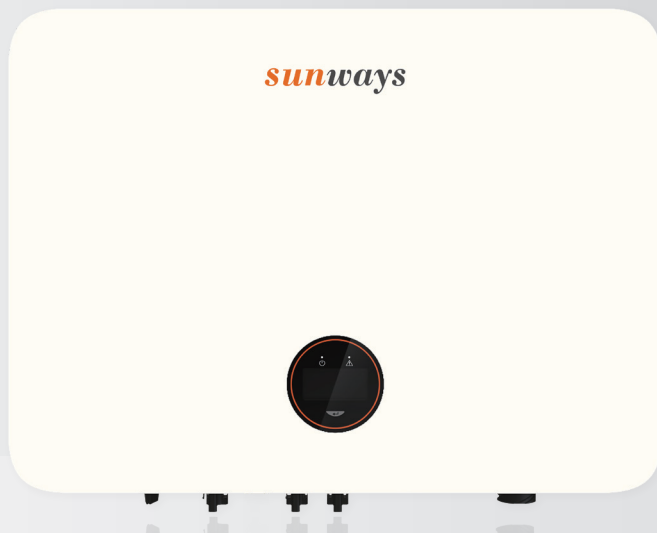

MAX 98.1% EFFICIENCY

IP65 PROTECTION



SAFE & RELIABLE

- High reliability due to good heat dissipation design
- Integrated lightning protection for both DC and AC
- Adapt to complex power grid
- High anti-corrosion ability with aluminum alloy die casting technology
- IP65, wider working temperature and altitude, adapt to various installation environments



HIGH YIELD

- High yield with Max. 98.1% efficiency
- European weighted efficiency 97.6%
- Wide MPPT voltage range
- Up to 10% continuous output overloading capacity
- Dual MPPT design with precise MPPT algorithm



EASY TO USE

- Compact elegant design, light weight, one-person installation
- Plug and play connectors, easy for installation
- Support wireless and wired internet connection (RS485/Wi-Fi/GPRS/LAN optional)
- Remote upgrading available
- Fast and easy configuration via App or OLED display



Model	STS-7KTL	STS-8KTL	STS-9KTL	STS-10KTL	STS-11KTL
Input					
Max. Input Power (W)	9,100	10,400	11,700	13,000	14,300
Start-up Voltage (V)	80	80	80	80	80
Max. DC Input Voltage (V)	600	600	600	600	600
Rated DC Input Voltage (V)	360	360	360	360	360
MPPT Voltage Range (V)	80~550	80~550	80~550	80~550	80~550
No. of MPP Trackers	2	2	2	2	2
No. of DC Inputs per MPPT	1/2	1/2	1/2	1/2	1/2
Max. Input Current (A)	15/30	15/30	15/30	15/30	15/30
Max. Short-circuit Current (A)	18/36	18/36	18/36	18/36	18/36
Output					
Rated Output Power (W)	7,000	8,000	9,000	10,000	11,000
Max. Output Power (W)	7,700	8,800	9,900	11,000	11,000
AC output rated apparent power (VA)	7,000	8,000	9,000	10,000	11,000
Max. Apparent Power (VA)	7,700	8,800	9,900	11,000	11,000
Rated Output Voltage (V)	220/230				
Rated AC Frequency (Hz)	50/60				
AC output rated current (A)	30.4	34.8	40.9	43.5	47.8
Max. Output Current (A)	35	36.5	45	45.6	47.8
Power Factor	0.8 leading ...0.8 lagging				
Max. total harmonic distortion	<3% @Rated Output Power				
DCI	< 0.5%In				
Efficiency					
Max. Efficiency	98.1%	98.1%	98.1%	98.1%	98.1%
European Efficiency	97.6%	97.6%	97.6%	97.6%	97.6%
MPPT Efficiency	99.9%	99.9%	99.9%	99.9%	99.9%
Protection					
DC Reverse Polarity Protection	Integrated				
Insulation Resistance Protection	Integrated				
DC Switch	Opcional				
Surge Protection	Integrated				
Over-temperature Protection	Integrated				
Residual Current Protection	Integrated				
Islanding Protection	Integrated				
AC Short-circuit Protection	Integrated				
AC Over-voltage Protection	Integrated				
General Data					
Dimensions (mm)	550W*410H*175D				
Weight (KG)	24	26			
Protection Degree	IP65				
Self-consumption at Night (W)	< 1				
Topology	Sem Transformador				
Operating Temperature Range (oC)	-30~60				
Relative Humidity (%)	0~100				
Operating Altitude (m)	4000 (depreciativo@ > 3000)				
Cooling	Natural Convection		Smart Fan Cooling		
Noise Level (dB)	< 25		< 40		
Display	OLED & LED				
Communication	RS485/WiFi/GPRS/LAN (Opcional)				
Compliance	NB/T32004、IEC62109、IEC62116、VDE4105、VDE0126、UTE C15-712-1、AS4777、C10/11、CEI0-21、RD1699、NBR16149、IEC61727、IEC60068、IEC61683、EN50549、EN61000				